Dura klick

GR

Mounting-System for greenroofs

The Duraklick - GR is available in 10°, 15° and 20°. These systems can be mounted in south or in east-west configuration. The elevated module position makes it ideal for all types of green roofs as well as for open land. This also opens up green roofs for economic use by photovoltaics. Due to the lower ambient temperature they have a higher efficiency.

Due to the special construction of the module support, this system is also suitable for high wind and snow loads.

The outstanding system characteristics such as easy assembly, by clicking in the module supports, the excellent load distribution due to the 230mm wide floor profile, as well as the light aluminium composite construction guarantee short assembly times and offer a wide range of applications

Convincing features:

- > simple and safe
- ▶ Module height ~ 30cm above roof cladding
- ▶ for legal promotion
- > also mountable in east-west configuration
- > corrosion resistant material and statically tested
- Made in Germany















Dura klick

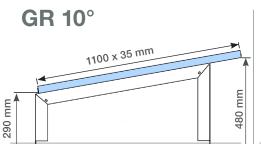


Technical Specifications

Inclination 10°
Rail length 0,3 - 6,0 m
Modul width 800 - 1.150 mm
Distributed load ca. 10,9 kg/m² *
Liniar load ca. 18 kg/m *
Material aluminium stainlesssteel



Technical Specifications


Inclination 10°
Rail length 0,3 - 6,0 m
Modul width 800 - 1.150 mm
Distributed load ca. 10,3 kg/m² *
Liniar load ca. 17,4 kg/m *
Material aluminium stainlesssteel

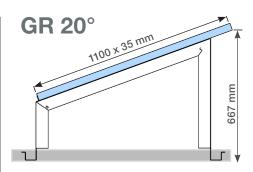

Technical Specifications

Inclination 10°
Rail length 0,3 - 6,0 m
Modul width 800 - 1.150 mm
Distributed load ca. 9,8 kg/m² *
Liniar load ca. 16,8 kg/m *
Material aluminium stainlesssteel

* assuming a module weight of 19 kg

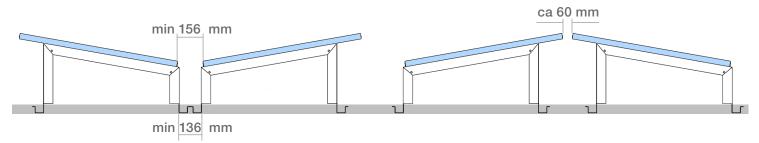





Soltop EU GmbH Sonnenhalde 5 D-88161 Lindenberg www.soltop.eu Hauptsitz Schweiz Soltop Schuppisser AG St. Gallerstrasse 3 CH-8353 Elgg Sitz der Gesellschaft: Lindenberg Registergericht: Kempten (Allgäu) Geschäftsführer: Andreas Zimmerer Handelsregister: HRB 14331 MwSt: 127/137/60143 UID: DE 300 49 1338 EORI: DE314291943832627

^{*} assuming a module weight of 19 kg

^{*} assuming a module weight of 19 kg